

WALK-ON GRAPHICS®

SLIP RESISTANT
FLOOR GRAPHIC SYSTEM



The Walk-On Graphics® two part system includes a printable vinyl base film and a UL 410 slip resistant overlamine to create durable floor signage applications.

Walk-On Graphics

Recommended for use on smooth, clean, flat surfaces like tile, sealed wood, ceramic tile vinyl and sealed concrete


4 mil printable vinyl base film available in white or clear finishes with removable adhesive

4 mil clear double polished and 6 mil clear embossed UL 410 certified overlamine options
Suitable for indoor short term floor graphics (<6 months)

Graphics withstand normal floor maintenance and cleaning

Print Compatibility: Latex, Eco-Solvent, True Solvent, UV Wide Format, Conventional Offset, UV Offset, UV Screen

Easy to apply and remove from these surfaces:

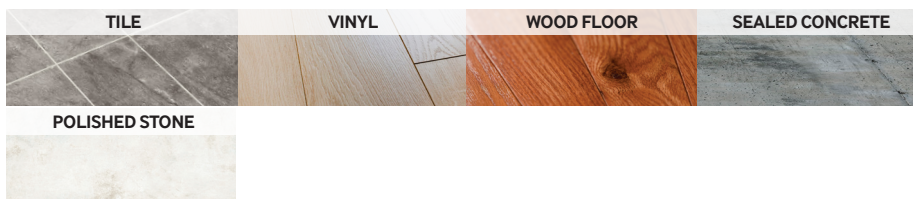

Applications

- Wayward Floor Graphics
- Floor Advertising Graphics
- Point-of-Purchase Floor Signage
- Social Distancing Floor Graphics
- Directional Arrows
- Counter Mats



WALK-ON GRAPHICS®

SLIP RESISTANT
FLOOR GRAPHIC SYSTEM



STOCKED PRODUCTS ▶

	Color	SKU #	Application	Film Thickness	Adhesive	Liner	Durability	Size
Base Film								
	White	SPMWOGWB5450N	Floor	4 mil	Removable	90# Layflat	6 months	54" x 50 yd
	Clear	SPMWOGCB5450N	Floor	4 mil	Removable	Clear Film Release Liner	6 months	54" x 50 yd
	Color	SKU #	Application	Adhesive	Liner	Durability	Size	
Recommended Overlamine								
	Double Polished Clear	LMWOG4LL5450	4 mil	Permanent	PET	3 years	54" x 50 yd	
	Embossed Clear	LMWOG6C35450	6 mil	Permanent	PET	Indoor Use Only	54" x 50 yd	

WALK-ON GRAPHICS®

SLIP RESISTANT
FLOOR GRAPHIC SYSTEM



CUSTOM SIZE OFFERING ▶

Color	SKU #	Application	Size (width)	Film Thickness	Adhesive	Liner	Wgt/MSI
Non Top Coated Base Film – UV Offset, Screen							
White	WOGFW	Floor	54"	4 mil	Removable	90# Layflat	.50#
Clear	WOGFC						
Color	SKU #	Application	Size (width)	Film Thickness	Adhesive	Liner	Wgt/MSI
Top Coated Base Film – Conventional Offset							
White	WOGFW/TC	Floor	54"	4 mil	Removable	90# Layflat	.50#
Clear	WOGFC/TC						
Color	SKU #	Size (width)	Film Thickness	Adhesive	Liner	Wgt/MSI	
Overlamine							
Clear	LM4CL	54"	4 mil	Permanent	Clear Film	.30#	
	SRV6500L		6 mil			.44#	

Custom base film and overlamine sold separately. Can be custom converted into sheets or rolls to meet your requirements.



TECHNICAL DATA ▶

Physical Properties		Vinyls	White Base Floor	Clear Base Floor
Application			Floor	Floor
Finish			Matte	Double-Polished Clear
Color			White	Clear
Adhesive			Removable - R32	Removable - R32
Film			Calendered Flex Vinyl	Calendered Flex Vinyl
Liner			90# Layflat	90# Layflat
Topcoat			Available - WOGFW/TC	Available - WOGFC/TC
Opacity			92% Minimum	15% Max (90+% Transmission)
Gloss Level			8% Typical	Double-Polished Clear
Thickness	Film		3.2 ± 0.2 mil	3.2 ± 0.2 mil
	Film w/ Adhesive		4.2 ± 0.2 mil	4.2 ± 0.2 mil
	Total Thickness		10.5 ± 0.2 mil	10.5 ± 0.2 mil
Adhesion	SS 15 min Room Temp Dwell		4-8 oz/in	4-8 oz/in
	SS 24 hr Room Temp Dwell		12-16 oz/in	12-16 oz/in
Weight	Film w/ Adhesive		140-145 gsm	130-135 gsm
	Total w/ Liner		290-300 gsm	280-290 gsm
Printability	w/o Topcoat		Screen, Solvent, UV Flat Bed Ink Jet	Screen, Solvent, UV Flat Bed Ink Jet
	w/ Topcoat		Offset	Offset

Physical Properties		Overlaminates	LMWOG4LL5450	LMWOG6C35450
Finish			Double-Polished Clear (DPC)	Embossed
Color			Clear	Clear
Adhesive			Permanent - P92	Permanent - P92
Film			Calendered Flex Vinyl	Embossed Rigid Vinyl
Liner			1.5 mil PET	1.5 mil PET
Opacity			15% max (90+% Transmission)	12-18% (85-95% Transmission)
Gloss Level			DPC	12% Typical
Thickness	Film		3.2 ± 0.2 mil	5.75 ± 0.2 mil
	Film w/ Adhesive		4.2 ± 0.2 mil	7.25 ± 0.2 mil
	Total Thickness		5.5 ± 0.4 mil	8.75 ± 0.2 mil
Adhesion	SS 15 min Room Temp Dwell		65 oz/in minimum	65 oz/in minimum
	SS 24 hr Room Temp Dwell		100 oz/in minimum	100 oz/in minimum
Weight	Film w/ Adhesive		125-130 gsm	215-220 gsm
	Total w/ Liner		170-180 gsm	260-270 gsm
Slip Resistance Certification			UL 410	UL 410

Conditions for Use	
Shelf Life	1 year
Clean Removability	6 months
Indoor Durability	6 months
Min Application Temp	40° F (4° C)
Service Temp Range	-20° to 150° F (-29° to 66° C)
Solvent Resistance	Good*
Water Resistance	Excellent

*Good for most petroleum solvents and lower aliphatic alcohols.
For ultimate solvent resistance, edge sealing is recommended.

The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.

TECHNICAL DATA ▶

Conditions for Use	
Shelf Life	1 year
Indoor Durability	6 months
Min Application Temp	40° F (4° C)
Service Temp Range	-20° to 150° F (-29° to 66° C)
Solvent Resistance	Good*
Water Resistance	Excellent

*Good for most petroleum solvents and lower aliphatic alcohols.
For ultimate solvent resistance, edge sealing is recommended.

Applying Walk-On Graphics

Remove the release liner from the back of the graphic and position it on the desired location of the floor. Lift one edge of the decal. with a squeegee, use overlapping strokes to apply pressure from the middle towards the edge of the decal.

If the decal is large, it is recommended to spray the floor with water mixed with a few drops of liquid soap and follow the above procedure. It is very important that all edges and corners are applied with firm pressure. When more than one panel is used, butt the edge together. Never overlap decals.

After application is completed, do not polish decal or surrounding floor for 24 hours. If the edges lift at all from the floor, the decal must be removed immediately and replaced. This is to prevent any accidents or tripping.

Maintenance

Walk-On Graphics should be maintained using normal floor maintenance procedures.

Removal

Remove the Walk-On Graphics decal by lifting one edge and pulling at a sharp angle, using short, sharp strokes until the decal is up. If the decal is applied to a waxed floor, it is recommended that the floor should be rewaxed.

The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.